



2023

因专业而领先，因细致而完美

# 达通电子

## 高品质HIFI线

还原最真实的声音



—— 经典系列 ——



型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DB600-5FT	1.5m/2pcs	¥ 3500
DB600-6.5FT	2m/2pcs	¥ 4500
DB600-10FT	3m/2pcs	¥ 6500

特殊长度欢迎定制  
Special length welcome to customize

## HIFI平衡线 | DB600

HIFI BALANCE CABLE

线径(OD): 8.5mm  
绝缘素材: 高纯度1.003级别FEP  
结构: 机械调谐间距/长度, 双/单系带螺旋避震, 全面讯号控制  
导体数目: 2X19AWG 2x0.6mm<sup>2</sup>  
导体质量: 高纯度超级铜 单支/多支OCC纯铜  
双层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
接驳端子: 镀金XLR

Wire diameter(OD): 8.5mm  
Insulation material: High purity 1.003 grade FEP  
Construction: Mechanically tuned pitch/length, double/single strap screw shock absorbers,full signal control  
Number of conductors: 2X19AWG 2x0.6mm<sup>2</sup>  
Conductor quality: High purity super copper single/multiple OCC pure copper  
Double shield coverage area: 100% shielding,full coverage  
Connection terminal: Gold plated XLR

## HIFI平衡线 | DB1000

HIFI BALANCE CABLE

—— 能量系列 ——



线径(OD): 11mm  
绝缘素材: 高纯度1.003级别FEP  
结构: 机械调谐间距/长度, 双/单系带螺旋避震, 全面讯号控制  
导体数目: 2X17AWG 2x1.0mm<sup>2</sup>  
导体质量: 高纯度超级铜 单支/多支OCC纯铜  
独立双层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
接驳端子: 镀银XLR(铆压型)

Wire diameter(OD): 11mm  
Insulation material: High purity 1.003 grade FEP  
Construction: Mechanically tuned pitch/length, double/single strap screw shock absorbers,full signal control  
Number of conductors: 2X17AWG 2x1.0mm<sup>2</sup>.  
Conductor quality: High purity super copper single/multiple OCC pure copper  
Independent double shield coverage area: 100% shielding,full coverage  
Connection terminal: Silver plated XLR(Riveted)

型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DB1000-4FT	1.2m/2pcs	¥ 8860
DB1000-5FT	1.5m/2pcs	¥ 11500
DB1000-6FT	1.8m/2pcs	¥ 13900

特殊长度欢迎定制  
Special length welcome to customize

—— 灵动系列 ——



型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DB7200-5FT	1.5m/2pcs	¥ 28800
DB7200-6.5FT	2.0m/2pcs	¥ 35200
DB7200-10FT	3.0m/2pcs	¥ 49600

特殊长度欢迎定制  
Special length welcome to customize

## HIFI平衡线 | DB7200

HIFI BALANCE CABLE

线径(OD): 25mm  
 绝缘素材: 空气绝缘  
 结 构: 机械调谐间距/长度, 双/单系带螺旋  
 避震, 全面讯号控制  
 导体数目: 3X18AWG 3x0.8mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 三层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 镀金XLR(铆压型)

Wire diameter(OD): 25mm  
 Insulation material: Air insulation  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 3X18AWG 3x0.8mm<sup>2</sup>  
 Conductor quality: High purity super copper  
 single/multiple OCC pure copper  
 Three layers shield coverage area: 100% shielding,full  
 coverage  
 Connection terminal: Gold plated XLR(Riveted )

## HIFI RCA线 | DR600

HIFI RCA CABLE

线径(OD): 6.0mm  
 绝缘素材: 高纯度1.003级别FEP  
 结 构: 机械调谐间距/长度, 双/单系带螺旋  
 避震, 全面讯号控制  
 导体数目: 1X19AWG 1x0.6mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 双层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 镀金RCA插头 ( 铆压型 )

Wire diameter(OD): 6.0mm  
 Insulation material: High purity 1.003 grade FEP  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 1X19AWG 1x0.6mm<sup>2</sup>  
 Conductor quality: High purity super copper  
 single/multiple OCC pure copper  
 Double shield coverage area: 100% shielding,full  
 coverage  
 Connection terminal: Gold plated RCA(Riveted)

—— 经典系列 ——



型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DR600-5FT	1.5m/2pcs	¥ 3500
DR600-6.5FT	2m/2pcs	¥ 4500
DR600-10FT	3m/2pcs	¥ 6500

特殊长度欢迎定制  
Special length welcome to customize

—— 能量系列 ——



型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DR1000-4FT	1.2m/2pcs	¥ 8860
DR1000-5FT	1.5m/2pcs	¥ 11500
DR1000-6FT	1.8m/2pcs	¥ 13900

特殊长度欢迎定制  
Special length welcome to customize

## HIFI RCA线 | DR1000

HIFI RCA CABLE

线径(OD): 11mm  
 绝缘素材: 高纯度1.003级别FEP  
 结 构: 机械调谐间距/长度, 双/单系带螺旋  
 避震, 全面讯号控制  
 导体数目: 2X17AWG 2x1.0mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 独立双层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 镀银RCA插头(铆压型)

Wire diameter(OD): 11mm  
 Insulation material: High purity 1.003 grade FEP  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 2X17AWG 2x1.0mm<sup>2</sup>.  
 Conductor quality: High purity super copper  
 single/multiple OCC pure copper  
 Independent double shield coverage area:  
 100% shielding,full  
 Connection terminal: Silver plated RCA(Riveted)

## HIFI RCA线 | DR7200

HIFI RCA CABLE

线径(OD): 25mm  
 绝缘素材: 空气绝缘  
 结 构: 机械调谐间距/长度, 双/单系带螺旋  
 避震, 全面讯号控制  
 导体数目: 3X18AWG 3x0.8mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 三层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 镀金RCA(铆压型)

Wire diameter(OD): 25mm  
 Insulation material: Air insulation  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 3X18AWG 3x0.8mm<sup>2</sup>  
 Conductor quality: High purity super copper  
 single/multiple OCC pure copper  
 Three layers shield coverage area: 100% shielding,full  
 coverage  
 Connection terminal: Gold plated RCA plug (Riveted )

—— 灵动系列 ——



型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DR7200-5FT	1.5m/2pcs	¥ 28800
DR7200-6.5FT	2.0m/2pcs	¥ 35200
DR7200-10FT	3.0m/2pcs	¥ 49600

特殊长度欢迎定制  
Special length welcome to customize

—— 能量系列 ——



## HIFI同轴数码线 | DD3000(75Ω)

HIFI DIGITAL CABLE

线径(OD): 13.5mm  
 绝缘素材: 高纯度1.003级别FEP  
 结 构: 机械调谐间距/长度,  
 双/单系带螺旋避震  
 导体数目: 1X12.5AWG 1x3.0mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 双层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 镀银RCA插头 (铆压型)

型 号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DD3000-5FT	1.5m/1pcs	¥ 6800
DD3000-6.5FT	2.0m/1pcs	¥ 8600

特殊长度欢迎定制  
 Special length welcome to customize

Wire diameter(OD): 13.5mm  
 Insulation material: High purity 1.003 grade FEP  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 1X12.5AWG 1x3.0mm<sup>2</sup>.  
 Conductor quality: High purity super steel single/multiple OCC steel  
 Double shield coverage area: 100% shielding, full coverage  
 Connection Terminal: Silver plated RCA plug (Riveted)


## HIFI平衡数码线 | DA7200(AES)

HIFI AES CABLE

线径(OD): 25mm  
 绝缘素材: 空气绝缘  
 结 构: 机械调谐间距/长度, 双/单系带螺旋  
 避震, 全面讯号控制  
 导体数目: 3X18AWG 3x0.8mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 三层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 镀金RCA(铆压型)

Wire diameter(OD): 25mm  
 Insulation material: Air insulation  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 3X18AWG 3x0.8mm<sup>2</sup>  
 Conductor quality: High purity super copper  
 single/multiple OCC pure copper  
 Three layers shield coverage area: 100% shielding,full  
 coverage  
 Connection terminal: Gold plated RCA plug (Riveted )

—— 灵动系列 ——

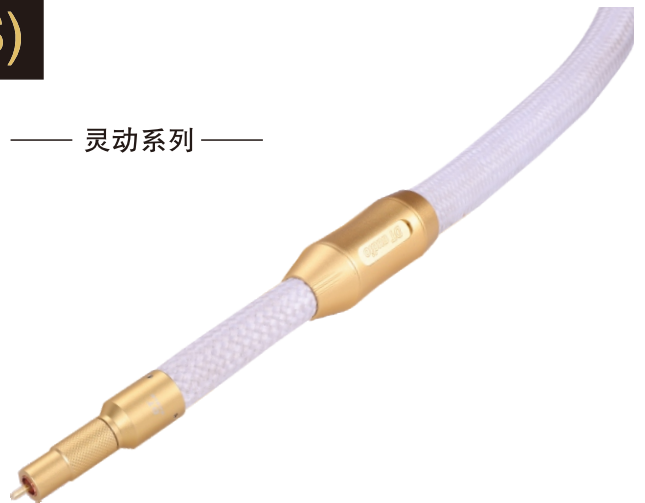

型 号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DA7200-5FT	1.5m/1pcs	¥ 15800

特殊长度欢迎定制  
 Special length welcome to customize

—— 经典系列 ——



型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
LP220-52R-5FT	1.5m/1pcs	¥ 1800

特殊长度欢迎定制  
Special length welcome to customize

## HIFI唱放线 | LP220-52R

HIFI LP CABLE

线径(OD): 11mm  
 绝缘素材: 高纯度PE  
 结 构: 机械调谐间距/长度  
 双/单系带螺旋避震  
 导体数目: 5条24AWG规格 正/负极 5x0.22mm<sup>2</sup>  
 导体质量: 高纯度OFC 单支/多支纯铜  
 地线及可脱离辅助屏蔽地线质量: 22AWG  
 多支OFC ( 双/单系带螺旋避震 )  
 双层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 专用镀金Y型插头, 专业镀金五芯头和镀金RCA插头

Wire diameter(OD): 11mm  
 Insulation material: High purity PE  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 5X24AWG 5x0.22mm<sup>2</sup>  
 Conductor quality: High purity super copper single/multiple  
 OFC pure

Copper ground wire and removable auxiliary screen mass: 22AWG  
 Multiple OFC pure copper (double/single tie spiral industry)  
 Double development shielding coverage area: 100% shielding,  
 comprehensive benefits  
 Connection terminal: special gold-plated Y plug, professional  
 gold plated five core head and gold  
 plated RCA plug

## HIFI唱放线 | LP600-52R

HIFI LP CABLE

线径(OD): 11mm  
 绝缘素材: 高纯度1.003级别FEP  
 结 构: 机械调谐间距/长度  
 双/单系带螺旋避震  
 导体数目: 5条19AWG规格 正/负极 5x0.6mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 地线及可脱离辅助屏蔽地线质量: 19AWG  
 多支OCC纯铜 ( 双/单系带螺旋避震 )  
 双层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 专用镀金Y型插头, 专业镀银五芯头和镀银RCA插头 ( 铆压型 )

Wire diameter(OD): 11mm  
 Insulation material: High purity 1.003 grade FEP  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 5X19AWG 5x0.6mm<sup>2</sup>.  
 Conductor quality: High purity super copper single/multiple  
 OCC pure  
 Copper ground wire and removable auxiliary screen mass: 19AWG  
 Multiple OCC pure copper (double/single tie spiral industry)  
 Double shield coverage area: 100% shielding,  
 comprehensive benefits  
 Connection terminal:special gold-plated Y plug, professional  
 silver plated five core head and silver  
 plated RCA plug (Riveted)

—— 能量系列 ——



型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
LP600-52R-5FT	1.5m/1pcs	¥ 11500

特殊长度欢迎定制  
Special length welcome to customize

—— 能量系列 ——



型 号 PART#	米 数 LENGTH	建议零售价 RMB MSRP
LP600-2X2R-5FT	1.5m/1pcs	¥ 11500

特殊长度欢迎定制  
Special length welcome to customize

## HIFI唱放线 | LP600-2X2R

HIFI LP CABLE

线径(OD): 11mm  
 绝缘素材: 高纯度1.003级别FEP  
 结 构: 机械调谐间距/长度  
 双/单系带螺旋避震  
 导体数目: 5条19AWG规格 正/负极 5x0.6mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 地线及可脱离辅助屏蔽地线质量: 19AWG  
 多支OCC纯铜 (双/单系带螺旋避震)  
 双层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 专用镀金Y型插头、镀银XLR和  
 镀银RCA插头 (铆压型)

Wire diameter(OD): 11mm  
 Insulation material: High purity 1.003 grade FEP  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 5X19AWG 5x0.6mm<sup>2</sup>  
 Conductor quality: High purity super copper single/multiple  
 OCC pure  
 Copper ground wire and removable auxiliary screen mass: 19AWG  
 Multiple OCC pure copper (double/single tie spiral industry)  
 Double shield coverage area: 100% shielding,  
 comprehensive benefits  
 Connection terminal: special gold-plated Y plug, professional  
 silver plated XLR and silver  
 plated RCA plug (Riveted)

## HIFI唱放线 | LP600-52X

HIFI LP CABLE

线径(OD): 11mm  
 绝缘素材: 高纯度1.003级别FEP  
 结 构: 机械调谐间距/长度  
 双/单系带螺旋避震  
 导体数目: 5条19AWG规格 正/负极 5x0.6mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 地线及可脱离辅助屏蔽地线质量: 19AWG  
 多支OCC纯铜 (双/单系带螺旋避震)  
 双层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 专用镀金Y型插头、镀银XLR和专  
 业镀银五芯头 (铆压型)

Wire diameter(OD): 11mm  
 Insulation material: High purity 1.003 grade FEP  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 5X19AWG 5x0.6mm<sup>2</sup>.  
 Conductor quality: High purity super copper single/multiple  
 OCC pure  
 Copper ground wire and removable auxiliary screen mass: 19AWG  
 Multiple OCC pure copper (double/single tie spiral industry)  
 Double shield coverage area: 100% shielding,  
 comprehensive benefits  
 Connection terminal: special gold-plated Y plug, silver plated  
 XLR and five pin plug (Riveted)

—— 能量系列 ——



型 号 PART#	米 数 LENGTH	建议零售价 RMB MSRP
LP600-52X-5FT	1.5m/1pcs	¥ 11500

特殊长度欢迎定制  
Special length welcome to customize

—— 能量系列 ——



型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DP1000-5FT	1.5m/1pcs	¥ 9800
DP1000-6.5FT	2.0m/1pcs	¥ 10188

特殊长度欢迎定制  
Special length welcome to customize

## HIFI小功率电源线 | DP1000

HIFI POWER CABLE

线径(OD): 11mm  
 绝缘素材: 高纯度1.003级别FEP  
 结 构: 机械调谐间距/长度,  
 双/单系带螺旋避震  
 导体数目: 3X17.5AWG 3x1.0mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 独立双层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 专用镀银电源插头(美标), 铁氟龙绝缘体,  
 大容量接插金属件(铆压型)

Wire diameter(OD): 11mm  
 Insulation material: High purity 1.003 grade FEP  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 3X17.5AWG 3x1.0mm<sup>2</sup>.  
 Conductor quality: High purity super copper  
 single/multiple OCC pure copper  
 Independent double shield coverage area:  
 100% shielding,full  
 Connection terminal: Special key silver power plug  
 (American Standard), Iron  
 chloron insulator,high capacity connecting  
 and inserting metal parts(Riveted)

## HIFI电源线 | DP6000

HIFI POWER CABLE

—— 能量系列 ——



线径(OD): 25mm  
 绝缘素材: 高纯度1.003级别FEP  
 结 构: 机械调谐间距/长度,  
 双/单系带螺旋避震  
 导体数目: 3X9.5AWG 3x6.0mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 独立双层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 专用镀银电源插头(美标), 铁氟龙绝缘体,  
 大容量接插金属件(铆压型)

Wire diameter(OD): 25mm  
 Insulation material: High purity 1.003 grade FEP  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 3X9.5AWG 3x6.0mm<sup>2</sup>  
 Conductor quality: High purity super copper  
 single/multiple OCC pure copper  
 Independent double shield coverage area:  
 100% shielding,full  
 Connection terminal: Special key silver power plug  
 (American Standard), Iron  
 chloron insulator,high capacity connecting  
 and inserting metal parts(Riveted)

型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DP6000-5FT	1.5m/1pcs	¥ 16900
DP6000-6.5FT	2.0m/1pcs	¥ 18600

特殊长度欢迎定制  
Special length welcome to customize



## HIFI电源线 | DP6000-L

HIFI POWER CABLE

线径(OD): 25mm  
 绝缘素材: 高纯度1.003级别FEP  
 结 构: 机械调谐间距/长度,  
 双/单系带螺旋避震  
 导体数目: 3X9.5AWG 3x6.0mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 独立双层屏蔽覆盖面积: 100%屏蔽, 全面覆盖  
 接驳端子: 专用镀金电源插头(美标), 铁氟龙绝缘体,  
 大容量接插金属件(铆压型)

Wire diameter(OD): 25mm  
 Insulation material: High purity 1.003 grade FEP  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 3X9.5AWG 3x6.0mm<sup>2</sup>  
 Conductor quality: High purity super copper  
 single/multiple OCC pure copper  
 Independent double shield coverage area:  
 100% shielding,full  
 Connection terminal: Professional gold-plated power plug  
 (American Standard), Iron chloron insulator,  
 high capacity connecting and inserting  
 metal parts(Riveted)



—— 能量镀金系列 ——

型 号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DP6000-L-5FT	1.5m/1pcs	¥ 17500
DP6000-L-6.5FT	2.0m/1pcs	¥ 19100

特殊长度欢迎定制  
 Special length welcome to customize

## HIFI喇叭线 | DS4250-B

HIFI SPEAKER CABLE

线径(OD): 18+18mm  
 结 构: 机械调谐间距/长度,  
 双/单系带螺旋避震  
 导体数目: 2X11AWG 2x4.25mm<sup>2</sup>  
 导体质量: 高纯度铜 单支/多支OFC纯铜  
 接驳端子: 专用镀银Y型

Wire diameter(OD): 18+18mm  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 2X11AWG 2x4.25mm<sup>2</sup>  
 Conductor quality: High purity copper OFC  
 Copper connection terminal: special silver plated  
 Y-type (Riveted)



—— 经典系列 ——

型 号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DS4250-B-8FT	2.5m/2pcs	¥ 3200
DS4250-B10FT	3.0m/2pcs	¥ 3800

特殊长度欢迎定制  
 Special length welcome to customize

—— 能量系列 ——



型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DS6000-8FT	2.5m/2pcs	¥ 31000
DS6000-10FT	3.0m/2pcs	¥ 35000

特殊长度欢迎定制  
Special length welcome to customize

## HIFI喇叭线 | DS6000

HIFI SPEAKER CABLE

线径(OD): 25mm  
 绝缘素材: 高纯度1.003级别FEP  
 结 构: 机械调谐间距/长度,  
 双/单系带螺旋避震  
 导体数目: 2X9.5AWG 2x6.0mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 接驳端子: 专用镀银Y型或轻质量  
 Z-plug香蕉型(铆压型)

Wire diameter(OD): 25mm  
 Insulation material: High purity 1.003 grade FEP  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 2X9.5AWG 2x6.0mm<sup>2</sup>  
 Conductor quality: High purity super copper single/multiple  
 OCC pure  
 Copper connection terminal: special silver plated Y-type or light  
 weight Z-plug Banana (Riveted)


## HIFI喇叭线 | DS4250

HIFI SPEAKER CABLE

线径(OD): 18+18mm  
 结 构: 机械调谐间距/长度,  
 双/单系带螺旋避震  
 导体数目: 2X11AWG 2x4.25mm<sup>2</sup>  
 导体质量: 高纯度超级铜 单支/多支OCC纯铜  
 接驳端子: 专用镀金Y型插头

Wire diameter(OD): 18+18mm  
 Construction: Mechanically tuned pitch/length,  
 double/single strap screw shock  
 absorbers,full signal control  
 Number of conductors: 2X11AWG 2x4.25mm<sup>2</sup>  
 Conductor quality: High purity super copper single/multiple  
 OCC pure  
 Copper connection terminal: special gold plated Y-type  
 plug(Riveted)


—— 灵动系列 ——

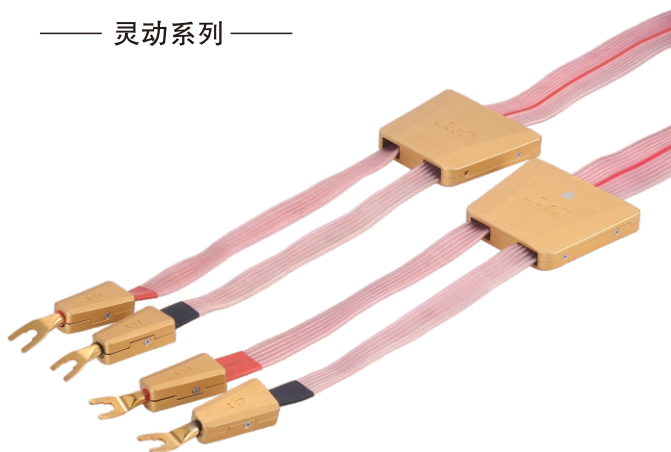

型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DS4250-8FT	2.5m/2pcs	¥ 26800
DS4250-10FT	3.0m/2pcs	¥ 36800

特殊长度欢迎定制  
Special length welcome to customize

—— 灵动系列 ——

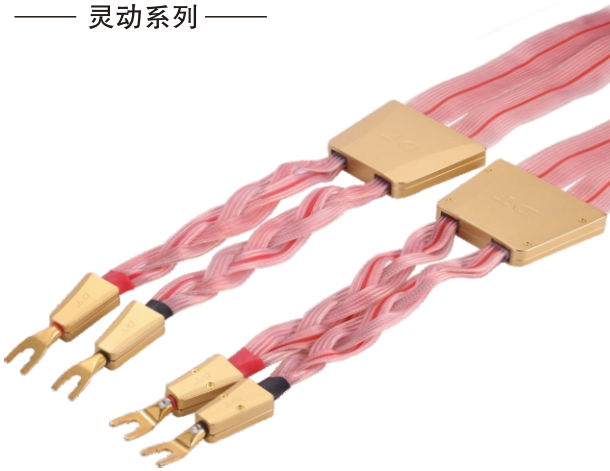

型号 PART#	米数 LENGTH	建议零售价 RMB MSRP
DS8500-8FT	2.5m/2pcs	¥ 46800
DS8500-10FT	3.0m/2pcs	¥ 56200

特殊长度欢迎定制  
Special length welcome to customize

## HIFI喇叭线 | DS8500

HIFI SPEAKER CABLE

线径(OD): 36+36mm

结 构: 机械调谐间距/长度,  
双/单系带螺旋避震

导体数目: 2X8AWG 2x8.5mm<sup>2</sup>

导体质量: 高纯度超级铜 单支/多支OCC纯铜

接驳端子: 专用镀金Y型插头

Wire diameter(OD): 36+36mm

Construction: Mechanically tuned pitch/length,  
double/single strap screw shock  
absorbers,full signal control

Number of conductors: 2X8AWG 2x8.5mm<sup>2</sup>

Conductor quality: High purity super copper single/multiple  
OCC pure

Copper connection terminal: special gold plated Y-type  
plug(Riveted)



# 宁波达通电子线缆有限公司

NINGBO DATONG ELECTRONIC CABLE CO.,LTD.

地址：宁波市江北区洪塘东路8号  
网址：[www.nbdtd.cn](http://www.nbdtd.cn)  
邮箱：[master@nbdtd.cn](mailto:master@nbdtd.cn)  
电话：0574-87754782

